

AIP series

AIP is a new generation of transimpedance, AC or DC coupled preamplifiers. It is designed to operate with either biased or non-biased VIGO detectors. AIP is "all-in-one" device — a preamplifier is integrated with a fan and a thermoelectric cooler controller in a compact housing. It is very convenient and user-friendly device, thus can be easily used in a variety of applications.

Features

- Integrated TEC controller and fan
- Frequency bandwidth up to 250 MHz
- Single power supply
- DC monitor
- Optimised for effective heat dissipation
- Compatible with optical accessories
- Cost effective OEM version available
- Universal and flexible



Specification (T_a = 20°C)

Parameter	Typical value	Conditions, remarks								
Low cut-off frequency f₀, Hz	DC, 10, 100, 1k, 10k									
High cut-off frequency fhi, Hz	100k, 1M, 10M, 100M, 250M									
Transimpedance K _i , V/A	up to 200k	fixed								
Output impedance R_{out} , Ω	50									
Outrot valle as avia a V	±2	$f_{hi} \leq 1 \text{ MHz, } R_L = 1 \text{ M}\Omega^{*)}$								
Output voltage swing V _{out} , V	±1	$f_{hi} > 1$ MHz, $R_L = 50 \Omega^*$								
Output voltage offset Voff, mV	max ±20**)									
Power supply voltage V _{sup} , V	+5 +12	with 2TE and 3TE cooled detectors with 4TE cooled detectors								
Power supply current I _{sup} , mA	max ±50									
Ambient operating temperature Ta, °C	10 to 30									
Signal output socket	SMA	RF output								
DC output socket	SMA	DC monitor								
Supply socket	DC 2.1/5.5 DC 2.5/5.5	$V_{sup} = +12 V$ $V_{sup} = +5 V$								
Mounting hole	M4									
Fan	yes									

^{*)} R_L – load resistance

Types of VIGO detectors that can be integrated with AIP preamplifier

- Photoconductive
 - PC-2TE, PC-3TE, PC-4TE
- Phtoconductive optically immersed PCI-2TE, PCI-3TE, PCI-4TE
- Photovoltaic
 - PV-2TE, PVA-2TE, PV-3TE, PV-4TE
- Photovoltaic optically immersed
 PVI-2TE, PVIA-2TE, PVI-3TE, PVI-4TE
- Photovoltaic multiple junction
 PVM-2TF
- Photovoltaic multiple junction optically immersed PVMI-2TE, PVMI-3TE, PVMI-4TE

Code description

	Type		f _{lo} , Hz		f _{hi} , Hz		Version
	AIP -		DC		100		
		10	-	1M	_	S *) (with package)	
		100		10M			
		1k		100M			
			10 k		250M		

^{*)} OEM version available upon request.

Included accessories


2×SMA-BNC cables + AC adaptor

Dedicated accessories

- OTA optical threaded adapter
- DRB-2 base mounting system

^{**)} Measured with equivalent resistor at the input instead of the detector, it is to avoid the environmental thermal radiation impact.



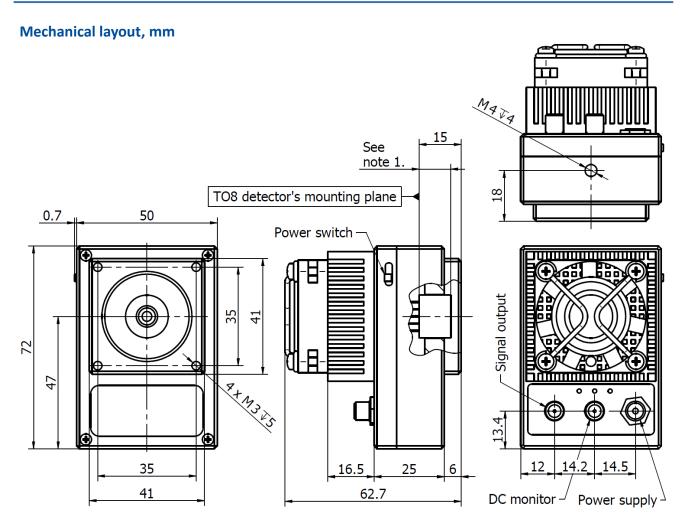

Notes:

TO8 detector dimensions in the "TO8 technical drawing".